


Passo 5/8" (15,875mm)

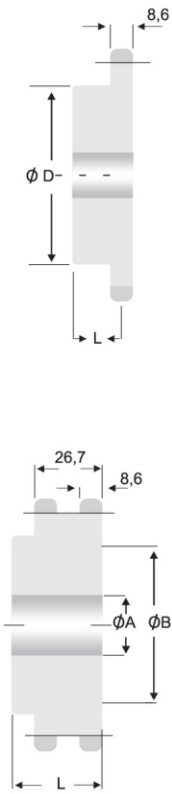


Z	PRIM	simples				dupla			
		A	B	D	L	A	B	D	L
009	46,42	15	19	28	25	15	19	28	45
010	51,37	15	22	33	25	15	22	33	45
011	56,35	15	25	38	25	15	25	38	45
012	61,34	15	29	44	25	15	29	44	45
013	66,34	15	32	48	25	15	32	48	45
014	71,34	17	35	53	25	17	35	53	45
015	76,36	17	39	59	25	17	39	59	45
016	81,37	17	43	64	25	17	43	64	45
017	86,40	17	46	69	25	17	46	69	45
018	91,42	17	49	74	25	17	49	74	45
019	96,45	17	53	79	30	17	53	79	45
020	101,48	20	56	84	30	20	56	84	45
021	106,50	20	59	89	30	20	59	89	45
022	111,55	20	63	94	30	20	63	94	45
023	116,59	20	66	99	30	20	66	99	45
024	121,62	20	67	100	34	20	67	100	45
025	126,66	20	67	100	34	20	67	100	45
026	131,70	20	73	110	34	20	73	110	45
027	136,74	20	73	110	34	20	73	110	45
028	141,79	20	57	86	37	20	73	86	51
030	151,87	20	57	86	37	20	73	86	51
031	156,92	20	57	86	37	20	73	86	51
032	161,96	20	57	86	37	20	73	86	51
033	167,01	20	57	86	37	20	73	86	51
034	172,05	20	57	86	37	20	57	86	51
035	177,10	20	57	86	37	20	57	86	51
036	182,15	20	57	86	37	20	57	86	51
038	192,24	25	57	86	37	25	57	86	51
040	202,34	25	57	86	40	25	57	86	55
045	227,58	25	57	86	40	25	57	86	55
048	242,73	25	65	98	40	25	65	98	55
054	273,03	25	65	98	40	25	65	98	55
057	288,18	25	65	98	40	25	65	98	55
060	303,33	25	65	98	40	25	65	98	55
076	384,15	30	65	98	40	30	65	98	55
095	480,14	30	73	110	40	30	73	110	55
114	576,13	30	73	110	40	30	73	110	55

fabricamos até 76 z

Norma ASA
Correntes ASA 50
Diâmetro do Rolo 10,16

Norma DIN
Correntes DIN 10 B
Diâmetro do Rolo 10,16

Passo 3/4" (19,05mm)

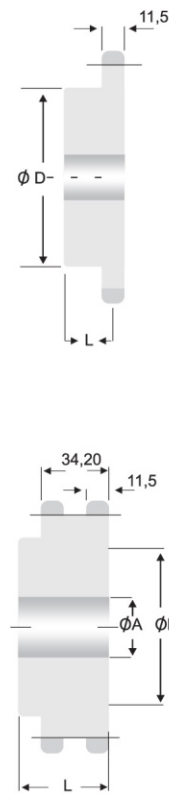


Z	PRIM	simples				dupla			
		A	B	D	L	A	B	D	L
009	55,70	15	22	33	30	15	22	33	45
010	61,65	15	26	39	30	15	26	39	45
011	67,62	20	31	46	30	20	31	46	45
012	73,60	20	35	52	30	20	35	52	45
013	79,60	20	39	58	30	20	39	58	45
014	85,61	20	43	64	30	20	43	64	45
015	91,63	20	47	70	30	20	47	70	45
016	97,65	20	51	77	30	20	51	77	45
017	103,67	20	56	83	30	20	56	83	45
018	109,71	20	60	90	30	20	60	90	45
019	115,74	20	64	96	36	20	64	96	50
020	121,78	20	67	100	36	20	67	100	50
021	127,82	25	71	107	36	25	71	107	50
022	133,86	25	75	113	36	25	75	113	50
023	139,90	25	75	113	36	25	75	113	50
024	145,95	25	65	98	39	25	65	98	58
025	152,00	25	65	98	39	25	65	98	58
026	158,04	25	65	98	39	25	65	98	58
027	164,09	25	65	98	39	25	65	98	58
028	170,14	25	65	98	39	25	65	98	58
030	182,25	25	65	98	39	25	65	98	58
031	188,30	25	65	98	39	25	65	98	58
032	194,35	25	65	98	39	25	65	98	58
033	200,41	25	65	98	39	25	65	98	58
034	206,46	25	65	98	39	25	65	98	58
035	212,52	25	65	98	39	25	65	98	58
036	218,57	25	65	98	39	25	65	98	58
038	230,69	30	65	98	45	30	65	98	65
040	242,80	30	65	98	45	30	65	98	65
045	273,09	30	73	110	45	30	73	110	65
048	291,27	30	83	124	45	30	83	124	65
054	327,63	30	83	124	45	30	83	124	65
057	345,81	30	83	124	45	30	83	124	65
060	363,99	30	83	124	45	30	83	124	65
076	460,98	30	83	124	45	30	83	124	65
076	460,98	30	93	140	65	30	93	140	76
095	576,17	30	90	136	45	30	90	136	65
095	576,17	30	93	140	70	30	93	140	76
114	691,36	30	100	150	45	30	100	150	65
114	691,36	30	107	160	76	30	107	160	80

fabricamos até 70 z

Norma ASA
Correntes ASA 60
Diâmetro do Rolo 11,19

Norma DIN
Correntes DIN 12 B
Diâmetro do Rolo 12,07

Passo 1 1/2" (38,1mm)

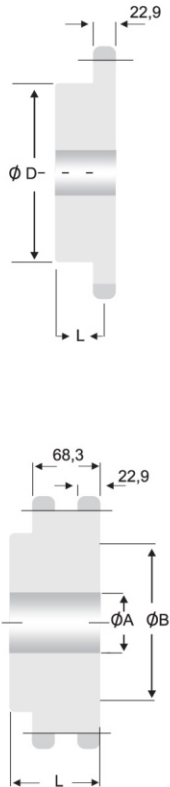


Z	PRIM	simples				dupla			
		A	B	D	L	A	B	D	L
011	135,23	35	61	91	50	35	61	91	90
012	147,21	35	69	103	50	35	69	103	90
013	159,20	35	65	98	50	35	77	115	90
014	171,22	35	65	98	50	35	65	98	90
015	183,25	35	73	110	50	35	73	110	90
016	195,29	35	73	110	50	35	73	110	90
017	207,35	35	73	110	55	35	73	110	90
018	219,41	35	73	110	55	35	73	110	90
019	231,48	35	73	110	55	35	73	110	90
020	243,55	35	73	110	55	35	73	110	90
021	255,63	35	73	110	55	35	73	110	90
022	267,72	35	83	124	55	35	83	124	90
023	279,80	35	83	124	55	35	83	124	90
024	291,90	35	83	124	55	35	83	124	90
025	303,99	40	83	124	55	40	83	124	90
028	340,29	40	83	124	55	40	83	124	90
030	364,49	40	83	124	55	40	83	124	90
035	425,04	40	83	124	55	40	83	124	90
038	461,37	40	90	136	55	40	90	136	95
040	485,60	40	90	136	60	40	90	136	95
045	546,19	40	90	136	60	40	90	136	95
048	582,54	40	90	136	60	40	90	136	95
054	655,26	40	90	136	60	40	90	136	95
057	691,62	40	90	136	60	40	90	136	95
060	727,99	40	100	150	60	40	100	150	95

fabricamos até 33 z

Norma ASA
Correntes ASA 120
Diâmetro do Rolo 22,22

Norma DIN
Correntes DIN 24 B
Diâmetro do Rolo 25,4

Passo 2" (50,8mm)

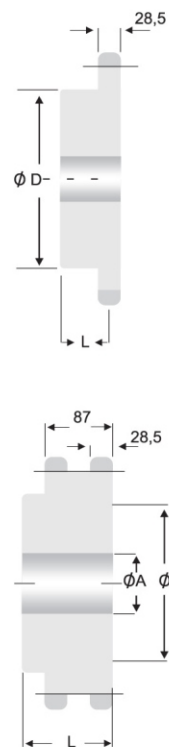

Z	PRIM	simples				dupla			
		A	B	D	L	A	B	D	L
011	180,31	45	65	98	58	45	65	98	115
012	196,28	45	73	110	58	45	73	110	115
013	212,27	45	73	110	58	45	73	110	115
014	228,29	45	83	124	60	45	83	124	115
015	244,33	45	83	124	60	45	83	124	115
016	260,39	45	83	124	60	45	83	124	115
017	279,46	45	90	136	64	45	90	136	115
018	292,55	45	90	136	64	45	90	136	115
019	308,64	45	90	136	64	45	90	136	115
020	324,74	45	90	136	64	45	90	136	115
021	340,84	45	90	136	64	45	90	136	115
022	356,96	45	90	136	64	45	90	136	115
023	373,07	45	100	150	70	45	100	150	115
024	389,19	45	100	150	70	45	100	150	115
025	405,32	45	100	150	70	45	100	150	115
030	485,99	45	100	150	70	45	100	150	115
035	566,72	45	100	150	70	45	100	150	115
038	615,17	45	100	150	70	45	100	150	115
040	647,47	45	100	150	70	45	100	150	115
045	728,25	45	100	150	70	45	100	150	115

fabricamos até 23 z

Norma ASA
Correntes ASA 160
Diâmetro do Rolo 28,57

Norma DIN
Correntes DIN 32 B
Diâmetro do Rolo 29,21